



Wood burning fires and stoves

2026



 Dik Geurts

Lovers of the real wood fire


The name Dik Geurts has been synonymous with craftsmanship and design ever since the company was founded, and over the past 40 years it has become a household name in the fireplace world. Since 2007 Dik Geurts has been fully integrated in DRU Verwarming B.V., an innovative company that has guaranteed top quality for centuries.

In addition to being designers, we at Dik Geurts are particularly fond of the real wood fire. In our factory in Duiven, The Netherlands, we work hard every day on the quality and ease of operation of our stoves and fires. With this brochure, we would like to show you how the combination of simplicity, experience and knowledge leads to beautiful fires and the most beautiful flames.

Dik Geurts is a trademark of DRU Verwarming B.V.



Scan the QR code and watch the DRU corporate video



ENVIRONMENT Wood firing and the environment	4
GREENBLOCKS The new standard in wood stoves	8
WOOD STOVE TECHNOLOGY Ingenuous technology, simple to use	10
DESIGN FIRES 3-Sided and Front	12
WOOD AND MULTI-FUEL STOVES 3-Sided and Front	26
INSERT AND BUILT-IN FIRES Front (including fires with fan), Tunnel, 2-sided and 3-sided	48
CONNECTION OPTIONS Insert- and built-in fires	64
CENTRAL HEATING FIRES Front	66
TECHNICAL DATA Dimensions and characteristics	68

Icons used



kW | Output
P. 6



EA | External Air
P. 7



IR | Infrared
P. 10

GREENBLOCKS



DG Filter
P. 9



DG Therm
P. 9



DG Cat
P. 9



DG Smart Assist
P. 9, 11



DG Room Sealed
P. 7, 9

Dik Geurts

Creation of flames



Scan the QR code and experience the passion of Dik Geurts wood fires.



Save on wood,
reduce fine dust
and help the
environment



All wood burning stoves and fires in the Dik Geurts range have a particularly high efficiency. A higher temperature is reached in these closed and clever woodburners, and as a result combustion is much more complete and efficient. Even residual soot particles are fully burned, so you save on wood, emit less particulate matter and soot particles, and thus protect the environment.

Ready for the future with EcoDesign

Since 1 January 2022, European legislation sets requirements for the minimum required efficiency of a stove and the maximum allowed emission of particulate matter. All Dik Geurts fireplaces and stoves comply with this legislation and carry the EcoDesign label. Several Dik Geurts fires and stoves are also Defra approved. For the right purchase, choose an environmentally friendly Dik Geurts wood stove for now and in the future.



Climate neutral

In principle, heating with wood is CO₂ neutral. During the growth phase of a tree, CO₂ is absorbed from the air. When the tree is cut down and burned, the same amount of CO₂ is released into the atmosphere. In order to be able to remain climate neutral, sustainably sourced wood must be used. Therefore a new tree is planted for every tree that is cut down. This process ensures everything remains nicely in balance.

Energy label

The Dik Geurts wood burning stoves are provided with an energy efficiency label. The greener the label, the better it is for the environment. Our stoves are all in the A-class or better.



The right way to burn

The best setup

With the so-called '**Swiss method**' you can burn wood safely and cleanly. At the bottom of the stove you should place large logs, on top of which you should put small pieces of wood, and on top of those, firelighters. Replenish the heating space when all that is left is a glow bed. Place a number of logs with the cleft side down in the fire box and open the air supply.

The right wood

The fuel must be sufficiently dry and suitable as firewood. Good firewood has a moisture percentage of 15%-20%. You should never burn waste wood such as chipboard or old railway sleepers, or treated wood. The combustion of waste or treated wood can produce toxic fumes. As well as being unsafe, this is also very harmful to the environment.



Scan the QR code for an explanation video about burning wood.

A Dik Geurts wood stove always has a high efficiency, low emissions of CO and fine dust and ultimate fire control. Guaranteed.

The right output

The output of a wood burning fire or stove must match the space you want to heat. If you have a fire with too much output, the room will soon become too hot. You will then not be able to let the fire burn to its full capacity and this can cause odour nuisance or extra pollution of the chimney. If the power is too low, you run the risk that the fire will not heat the room enough.

Dik Geurts offers a wide range of stoves and fires for larger and smaller rooms. Because these fires can also be fired at low power (4 kW), they are extremely suitable for use in spring or autumn.



kW (Output, indicated in kilo Watt)

Fireplaces with outdoor air connection

Houses today are increasingly well insulated. To ensure that enough fresh air still enters the home, ventilation systems are often installed. It is therefore important to consider the supply air for combustion when choosing your fireplace. For instance, you can get the supply air from the setup room, but also from outside. To get the supply air for wood combustion from outside, it is important to equip a wood fire with an outside air connection. We distinguish between:



EA fireplaces ('External Air'), standard

- used in neutral or overpressure situations
- with the EA kit, oxygen for combustion can come almost entirely from outside
- possible for all fireplaces



RS fireplaces ('DG Room Sealed'), option

- used in low pressure situations in the living space
- oxygen for combustion comes entirely from outside
- optional with a large number of fireplaces

Modern homes choose RS

RS wood-burning fireplaces are often installed in modern, passive and gap-tight homes. Before delivery, these fireplaces are tested for leak-tightness and provided with a certificate. Optimally suited for a balanced indoor climate and optimum heating pleasure.

GREENBLOCKS

DG Room Sealed is a GreenBlocks option (see page 9).




Calculate output

Calculate the content of the space you want to heat (length x width x height). Next, it is important to get an idea of the extent to which your house is insulated.

- A Home is fully insulated
- B Partially insulated, no double glazing throughout
- C Virtually uninsulated and no double glazing

The graph shows the output (in kilowatts) required to heat your home.

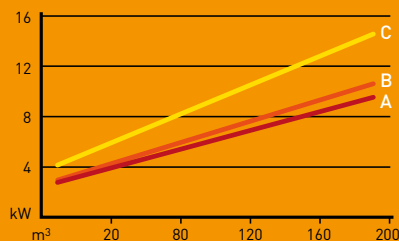

Warm heart for Uganda

At Dik Geurts we care for the world around us, and human beings also deserve our attention. In our project 'A fireplace for you, a future for her', part of the proceeds from our fires is used to provide women in Uganda with a microcredit for a tree plantation.





GREENBLOCKS

How GREEN do you want to burn?



The NEW standard in wood stoves

With GreenBlocks from Dik Geurts, you burn exactly how you want – but greener than ever before.

Thanks to this smart system, you can easily expand your wood stove with environmentally friendly options. This way, you decide how green and environmentally conscious your burning is. GreenBlocks is designed for those looking for a sustainable and customizable heating solution.

Stylish and ready for the future!

Your GreenBlocks wood stove in 3 steps:

1. Choose your favourite wood stove and desired options
2. Visit a dealer for expert advice
3. Place your order and enjoy eco-friendly and sustainable heating



The ultimate modular stove

This innovative system will redefine the way we think about wood heating. Green burning for now and the next generation. To make our wood stoves greener than ever, more options and models will be available for GreenBlocks in the future.



DG Cat:

The catalytic converter converts unburned gases and particles in the smoke into less harmful substances. This reduces CO emissions by up to 50%. DG Cat is always combined with DG Smart Assist for ultimate efficiency!



DG Smart Assist:

DG Smart Assist automatically regulates the airflow for optimal combustion. When it's time to add wood, the stove signals you and you receive a notification via the free app (optional). This saves wood and reduces emissions and odor. More info, see page 11.



DG Room Sealed:

The stove is made extra airtight — ideal for airtight or passive houses. DG Room Sealed ensures that oxygen for combustion comes entirely from outside and no CO enters the living room.



DG Filter:

The fine dust filter captures fine particles using an electrostatic electrode. This significantly reduces the amount of fine dust released through the chimney. Emissions are reduced by up to 75% with this filter.

OR



DG Therm:

Those who choose this option enjoy prolonged warmth without extra fuel. The heat-accumulating stones in the wood stove store heat while burning and gradually release it afterward. This way, you benefit from hours of pleasant, radiant warmth.



More info:
www.drufire.com/greenblocks
or scan the QR code

Thoughtful technique, simple to use



A Dik Geurts wood stove is not just a cabinet in which you can burn wood. It is a thoughtfully-designed device that ensures efficient and clean combustion at a high efficiency. Our fires and stoves have a closed combustion chamber (so no grate) that provides good insulation, and the flue gases that are released during combustion are led outside via an ingenious labyrinth.

Infrared glass

At Dik Geurts we use infrared glass for a number of our fires and stoves to circulate the heat in the fire box. This gives a higher efficiency, retains the heat in the fire and as a result the glass stays clean much longer.



IR (Infrared)

Vermiculite

The combustion chambers of all Dik Geurts fires are insulated with heat-retaining natural vermiculite. For a nice contrast with the yellow flames, the vermiculite in the combustion chamber of our Design fires is coloured dark anthracite.

Floor plates

For a complete set-up and extra protection of the floor, we offer round, rectangular and square floor plates. Finished in dark anthracite steel and available in different sizes.



Optional floor plate

Simple operation



DG Smart Assist

Always enjoy perfect combustion with DG Smart Assist. This smart system lets you easily control your wood fire, with automatic air control and wood refill notifications. DG Smart Assist makes burning wood easy, efficient and environmentally friendly.

Characteristics

- Automatic air slide
- Temperature sensor controls the air supply
- Always an optimal restart
- Always refill at the right time (saving on wood)

Control DG Smart Assist

Automatic (default)

- Refilling: sound signal via the wood stove

Via smartphone/tablet (optional, via free app)

- Select flame height and heat output
- Refilling: notification via smartphone or tablet

GREENBLOCKS



DG Smart Assist is a GreenBlocks option (see page 9).



Watch the DG Smart Assist video



Simple operation: just one lever



Manual control

Dik Geurts fires and stoves are easy to operate. They have a single lever to regulate the surprisingly sophisticated air supply. Thanks to this, Dik Geurts fires and stoves ignite very easily.

Design fires

The eye-catcher
for every interior





A design fire gives your home character and can be the beating heart of any interior. The Dik Geurts design fires can seem to float in space and at the same time form a natural unity with the rest of the room.

Page
14



ODIN FRONT

Base
Fixed
Plateau
Wall

Page
16



ODIN TUNNEL

Base
Fixed
Plateau

Page
18



OVAL FRONT

Base
Fixed
Legs
Plateau
Wall

Page
20



OVAL TUNNEL

Base
Fixed
Legs
Plateau

Page
22



BORA CORNER

Cubes
Fixed
Floating Plateau
Straight Plateau
Wall

Odin

Function and design go hand in hand perfectly

The unique, round design not only makes the Odin a real eye-catcher, but its shape also makes for a great flame picture.

- Faster warmth while environmentally friendly
- Unique round glass window
- Hanging from the ceiling or on the wall or standing on a plateau or robust base



Base with external air connection



Odin Front, Fixed

Efficiency 75,2% **A**
WxDxH 606x380x606 mm



Odin Front, Wall

Efficiency 75,2% **A**
WxDxH 606x415x606 mm



Odin Front, Base

Efficiency 75,2% **A**
WxDxH 606x600x940 mm



Scan the QR code for a preview



Odin Front, Plateau

Efficiency 75,2% **A**
WxDxH 1600x380x842 mm



4-8 kW



EA



Scan the QR code
for a preview



Odin Tunnel, Fixed

Efficiency 75,0% **A** →
WxDxH 606 x 400 x 606 mm

 
6-10 kW EA



Scan the QR code
for a preview



Ultimate fire
experience with
two-way visibility
and warmth



Odin Tunnel, Base


Efficiency 75,0% **A** →
WxDxH 606 x 600 x 940 mm



6-10 kW EA

Odin Tunnel, Plateau

Efficiency 75,0% **A** →
WxDxH 1600 x 400 x 842 mm



6-10 kW EA



Oval

The new style of heating

Typical Dik Geurts is this design fireplace with its oval shape. The various placement options make the Oval suitable for any interior.

- Beautiful fire view due to oval shape
- Unique air slide for easy control of flame intensity
- Wall-mounted, free hanging from the ceiling or standing on a plateau, robust base or legs



Base with external air connection




Oval Front, Base

Efficiency 75,9% **A**
WxDxH 980x380x944 mm



Oval Front, Fixed

Efficiency 75,9% **A**
WxDxH 980x380x606 mm




Oval Front, Plateau

Efficiency 75,9% **A**
WxDxH 2000x380x838 mm



Oval Front, Wall

Efficiency 75,9% **A**
WxDxH 980x380x606 mm





Scan the QR code
for a preview

Oval Front, Legs

Efficiency 75,9% **A**
WxDxH 980x474x926 mm



6-10 kW



EA



DG
Room
Sealed





Oval Tunnel, Fixed

Efficiency 81,5% **A+**
WxDxH 980x380x606 mm



9-12 kW



IR



EA



DG
Room
Sealed



Scan the QR code
for a preview




Unique design
and a beautiful fire
from two sides

Oval Tunnel, Base

Efficiency 81,5% **A+**
WxDxH 980x380x944 mm








Oval Tunnel, Plateau



Efficiency 81,5% **A+**
WxDxH 2000x380x838 mm




Oval Tunnel, Legs

Efficiency 81,5% **A+**
WxDxH 980x474x926 mm






Bora Corner

Robust cube with double-sided fire view

The two-sided glass window of the Bora Corner design fires gives a beautiful fire view. Hanging in the room or standing on a plateau, the Bora provides warmth and atmosphere throughout the area.

- Choose a left or right version
- Design fireplace for any position in the house
- Wide output range, optimally adjustable

Bora Corner, Cubes

Efficiency 78,1% **A**
WxDxH 625x577x1030 mm



4-9 kW



IR



EA



DG
Room
Sealed







Scan the QR code
for a preview



Bora Corner, Fixed

Efficiency 78,1% **A**
 WxDxH 505x410x510 mm

 4-9 kW
  IR
  EA
  DG
 Room Sealed




Scan the QR code for a preview



Bora Corner, Floating Plateau

Efficiency 78,1% **A**
 WxDxH 1200x450x829 mm

 4-9 kW
  IR
  EA
  DG
 Room Sealed




Scan the QR code for a preview





Scan the QR code
for a preview

Bora Corner, Straight Plateau

Efficiency 78,1% **A**
WxDxH 1500x450x879 mm



4-9 kW




IR



EA



DG
Room
Sealed

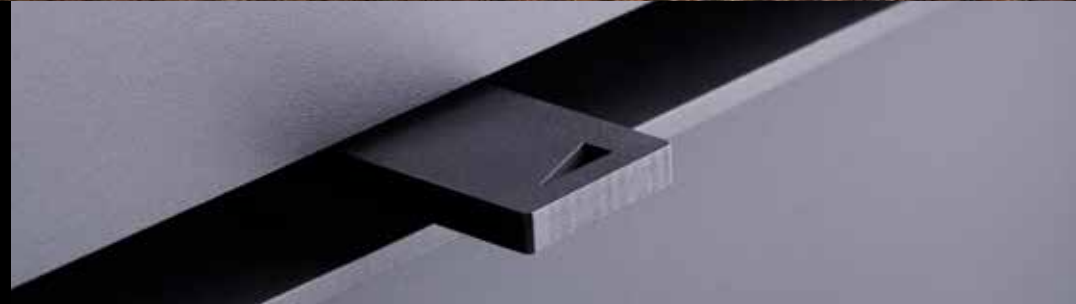

Plateau for wood
storage is available
in different sizes



Bora Corner, Wall

Efficiency 78,1% **A**
WxDxH 505x448x510mm



4-9 kW



IR



EA



DG
Room
Sealed



Scan the QR code
for a preview

Wood and multi-fuel stoves

Pinnacle of
atmosphere
and warmth

A long gaze into dancing flames, the cosy sound of a real crackling fire and the warmth from a natural source. With a Dik Geurts wood fire you bring the old-fashioned cosiness of a campfire to your living room.

Page
28



VIDAR TRIPLE
Small-Medium-Large
Store
Floating Plateau
Straight Plateau
Wall

Page
32




FOLKE

Page
33



KALLE NEXT

Page
34



MODIVAR 5
Store Front
Store Corner
Floating Plateau
Straight Plateau

Page
36



ORBE
ORBE, HIGH

Page
38



SOREN 5

Page
38




ASTE 5

Page
39



LARS 1000

Page
40



IVAR
5, Low
5, High
5, Store
8, Low
8, Store

Page
46



JANNIK
Medium, Low
Medium, High
Large

Vidar Triple

A stove to suit any home

Vidar stoves come in several shapes and sizes. There is always a suitable stove to suit your home.

- Freestanding with log compartment, standing on a plateau or wall-mounted
- Fits any room with a choice of 3 sizes
- Automatic control via smartphone or tablet
- Fitted with IR (infrared) side windows for extra-clean glass
- Optional elevated ash threshold

GREENBLOCKS



Vidar Triple Medium, Floating Plateau

Efficiency 76,3% **A**
W x D x H 1200x450x835 mm

- 4-9 kW
- IR
- EA
- DG Room Sealed
- DG Smart Assist



Vidar Triple Medium, Straight Plateau

Efficiency 76,3% **A**
W x D x H 1500x450x885 mm

- 4-9 kW
- IR
- EA
- DG Room Sealed
- DG Smart Assist



Vidar Triple Medium, Wall

Efficiency 76,3% **A**
W x D x H 662 x 430 x 535 mm

- 4-9 kW
- IR
- EA
- DG Room Sealed
- DG Smart Assist



Scan the QR code for a preview

Vidar Triple Medium, Store

Efficiency 76,3% **A**
WxDxH 662x410x850 mm



4-9 kW



IR



EA



DG
Room
Sealed



DG
Smart
Assist



Scan the QR code
for a preview



Vidar Triple Large, Wall

Efficiency 79,0% **A**
 W x D x H 800 x 430 x 535 mm



Scan the QR code for a preview

Vidar Triple Large, Store

Efficiency 79,0% **A**
 W x D x H 800 x 410 x 850 mm



Vidar Triple Large, Straight Plateau

Efficiency 79,0% **A**
 W x D x H 1500 x 450 x 885 mm



More space,
 modern style,
 efficient heat



Scan the QR code for a preview

GREENBLOCKS



Vidar Triple Small, Wall
 Efficiency 79,0% **A**
 WxDxH 500x380x535 mm

4-7 kW IR EA DG Room Sealed DG Smart Assist

Scan the QR code for a preview

Vidar Triple Small, Store

Efficiency 79,0% **A**
 WxDxH 500x360x850 mm

- 4-7 kW IR EA DG Room Sealed DG Smart Assist



Vidar Triple Small, Floating Plateau

Efficiency 79,0% **A**
 WxDxH 1200x450x835 mm

- 4-7 kW IR EA DG Room Sealed DG Smart Assist



Vidar Triple Small, Straight Plateau

Efficiency 79,0% **A**
 WxDxH 1500x450x885 mm


- 4-7 kW IR EA DG Room Sealed DG Smart Assist



Scan the QR code for a preview



Scan the QR code for a preview

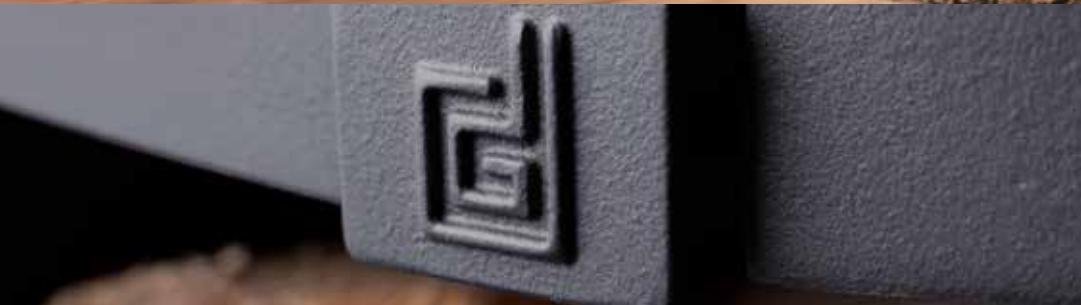

Folke

Efficiency
WxDxH

77,3%
476 x 410 x 1000 mm

A



4-8 kW



IR



EA



DG
Room
Sealed



DG
Smart
Assist

Folke

Atmospheric,
with or
without fire

Thanks to the Folke's three-sided fire view, you can enjoy the lively flames even more. The wood compartment underneath the fire box gives this stove a rustic and atmospheric look, even when the stove is not burning.

- Unique air slide
- Automatic control via smartphone or tablet
- Heat reflective (infrared) side windows
- Optional kit for self-closing door
- Suitable for mechanically ventilated and passive houses

GREENBLOCKS

Kalle Next

Extra-large windows for an optimal view of the fire


The Kalle Next is a stylish wood burning stove with an industrial look and a practical wood storage compartment beneath the combustion chamber. The three large windows provide a stunning view of the flames.

- Enjoy a beautiful wood fire in an environmentally friendly way
- Optional kit for self-closing door
- Choose DG Smart Assist for automatic air control and perfect combustion
- Optional filter reduces fine dust emissions by up to 75%

Kalle Next

Efficiency 77,3% **A** 

WxDxH 510x381x1000mm



GREENBLOCKS



Scan the QR code
for a preview

Modivar 5

Tight shapes and ultimate fire control

Thanks to their sleek shapes and dark steel, Modivar stoves are ideal for a modern interior. If you are looking for something really special then a floating plateau is worth it.

- Ultimate fire control thanks to simple air slide
- Integrated door handle
- Choice of wood compartments and plateaus



Modivar 5, Floating Plateau

Efficiency 82,0% **A+**
WxDxH 1200x450x857 mm



Modivar 5, Straight Plateau

Efficiency 82,0% **A+**
WxDxH 1500x450x907 mm



Modivar 5, Store Front

Efficiency 82,0% **A+**
WxDxH 450x368x1000 mm





Modivar 5, Store Corner

Efficiency 82,0% **A+**
WxDxH 450 x 368 x 1000 mm



Scan the QR code
for a preview



4-7 kW



EA








DG
Room
Sealed





Scan the QR code for a preview

Orbe			
Efficiency	81,6%	A+	
WxDxH	480x480x1052 mm		
			
5-9 kW	EA	DG Cat	DG Smart Assist DG Room Sealed

Orbe

The perfect mix of warmth and design

The Orbe is a modern, freestanding wood stove that fits perfectly into both classic and contemporary interiors. The combination of an integrated door handle and premium finish creates a luxurious look.

- Robust cast-iron door
- Automatic control via smartphone or tablet
- Matching steel floor plate
- Optional kit for self-closing door
- Suitable for mechanically ventilated and passive houses

GREENBLOCKS

Orbe, High

The ultimate modular stove

The Orbe, High combines sleek design with an impressive, classic flame displays. A stylish source of warmth that brings every living room to life. This modern, efficient stove makes the most of your firewood, especially when paired with GreenBlocks, the smart modular stove system.

- The curved glass window offers a beautiful view of the fire
- Excellent output for an average-sized living room
- The ultimate modular wood stove
- Fully compatible with all GreenBlocks options
- Low fine dust emissions thanks to high-quality combustion

Orbe, High

Efficiency 81,6% **A+**
WxDxH 480x480x1434 mm



GREENBLOCKS



Scan the QR code for a preview

Aste 5 & Soren 5

Woodburning stove with rural countryside look

The Aste 5 and Soren 5 have a sturdy appearance with crisp lines and plenty of fire visibility. It is easy to install in an existing situation. The cast-iron door and the classic legs give the stove a robust appearance.

- Ideal for placing in an existing fireplace
- Chimney connection only 10 cm from the back
- Stylish door handle



Aste 5

Efficiency
WxDxH

82,0%

A+

486 x 350 x 555 mm



EA



DG
Room
Sealed



Scan the QR code
for a preview

Soren 5

Efficiency 82,0%

A+

WxDxH 450x350x570 mm



4-7 kW



EA



DG
Room
Sealed



Scan the QR code
for a preview



Scan the QR code
for a preview

Lars 1000

Atmosphere, heat and slow-cooking

Above the glass window of the Lars 1000 wood burning stove there is a room that can be used as an oven. This stove offers atmosphere, warmth and also the possibility to prepare simple dishes.

- Unique oven at the top of the stove
- High efficiency
- Low particulate emissions thanks to high-quality combustion

Lars 1000

Efficiency 82,0% **A+**
WxDxH 448x348x1000 mm



4-7 kW



EA



DG
Room
Sealed



Ivar 5

Versatile source of atmosphere for the real enthusiast

The Ivar series is recognisable by the sleek cast iron door that offers a full view of the flames. Ivar stoves combine a compact and stylish appearance with the technically advanced combustion process for which Dik Geurts is known.

- Removable 'cold' handle
- Suitable for installation in existing spaces
- Wide output range & extremely low emissions





Ivar 5, Low

Efficiency 82,0% **A+**
WxDxH 450 x 350 x 555 mm



4-7 kW



EA



DG
Room
Sealed





Ivar 5, High

Efficiency 82,0% **A+**
WxDxH 450x350x660 mm



4-7 kW



EA



DG
Room
Sealed



Cast iron door with
removable handle





Ivar 5, Store

Efficiency 82,0% **A+**
WxDxH 450x350x850 mm



4-7 kW



EA



DG
Room
Sealed



Ivar 8



Ivar 8, Low

Efficiency 76,6% **A** →
WxDxH 540x350x555 mm

5-10 kW EA DG Room Sealed



Scan the QR code for a preview



Scan the QR code
for a preview



Ivar 8, Store

Efficiency 76,6% **A**
WxDxH 540x350x850 mm



5-10 kW



EA



DG
Room
Sealed



Large glass
window with wide
view of the fire

Jannik

Strikingly beautiful details, typically Dik Geurts

With the stoves in the Jannik series you recognise the robust details that are typical for the designs of Dik Geurts. Clean lines, sturdy hinges and a unique, slim handle. This handle provides easy access to the inside of the stove.

- Unique handle
- Wide power range
- Typical Dik Geurts wood-burning stove



Jannik Medium, High

Efficiency 82,0% **A+**
WxDxH 550x375x900 mm



Jannik Medium, Low

Efficiency 82,0% **A+**
WxDxH 550x375x680 mm





Jannik Large

Efficiency 81,5% **A+**
WxDxH 620x380x780 mm



4-8 kW



EA



Inserts and built-in fires

The solution for
renovation and
new construction

Inserts are designed for installation in an existing situation. When converting or renovating, an old fire can be replaced easily by a modern and environmentally friendly fire with a higher output. Built-in fires are placed predominantly in new situations.

Page
52



**FRONT
INSTYLE**

500
550
600
650
700
800
1000

Page
54



**FRONT
PROSTYLE**

500
550
600
650
700
800
1000

Page
56



**FRONT, VENTILATOR
INSTYLE**

600V Next
700V Next
800V Next

Page
58



**TUNNEL
INSTYLE**

Tunnel 700

Page
58



**TUNNEL
PROSTYLE**

Tunnel 700

Page
60



**2-SIDED SLIM
INSTYLE**

Corner Slim 660/495
Corner Slim 660/570


Page
62



**2-SIDED
INSTYLE**

Corner 660 Low
Corner 660 High

Page
63



**3-SIDED
INSTYLE**

Triple 660 Low

Instyle & Prostyle

Inserts and built-in fires for every interior

Dik Geurts has a wide range of inserts and built-in fires. Tunnel fires, 3-sided fires, fires with an extra large glass window and different kinds of frames; we have a suitable fire for every interior.

The Instyle fires have a completely clear glass window. The Prostyle range with screen-printed glass are made for an even more beautiful view of the fire.



Door and glass options



Instyle fireplaces
Clear glass window



Prostyle fireplaces
Black screen-printed glass

Frames

A frame creates a neat and finished look for the built-in/insert fireplace. It hides any spaces between the fireplace and the surrounding wall, creating a seamless and professional look. At Dik Geurts, there is a very wide choice of frames in different styles.

Standard frames for front and tunnel fires



Frame type	Instyle/Prostyle	Instyle/Prostyle						
		500	550	600	650	700-Tunnel ¹⁾	800	1000
Classic Line 4S	WxH	580 x 537	587 x 617	660 x 537	710 x 552	760 x 657	860 x 637	1060 x 637
Classic Line 3S	WxH	580 x 517	n/a	660 x 517	710 x 532	n/a	n/a	n/a
Modern Line	WxH	580 x 537	587 x 617	660 x 537	710 x 552	760 x 657	860 x 637	1060 x 637
Slim Line	WxH	540 x 497	547 x 577	620 x 497	670 x 512	720 x 617	820 x 597	1020 x 597
Build in 3 mm	WxH	506 x 463	513 x 543	586 x 463	636 x 478	686 x 583	786 x 563	986 x 563
Build in 8 mm	WxH	n/a	n/a	600 x 477	650 x 492	700 x 597	n/a	n/a

¹⁾ Frames on the Tunnel can be combined.

Standard frames for front fires with ventilating fan



Frame type	Instyle	Instyle		
		600V Next	700V Next	800V Next
Classic Line 4S	WxH	640 x 547	740 x 667	840 x 647
Build in 3 mm	WxH	566 x 473	666 x 593	766 x 573

Custom-made frames

The Dik Geurts product options are extensive. Nevertheless, it is possible that something does not fit during a conversion or renovation. In that case, a solid Classic Line 4S front frame can be custom-made to fit an existing fireplace opening. The width can vary between 20 and 100 mm.

Available for fireplaces:

- Instyle/Prostyle 500, 550, 600, 650, 700, 800, 1000
- Instyle/Prostyle Tunnel
- Instyle 600V Next, 700V Next, 800V Next

Instyle Front

Replace your old (open) fireplace for an eco-friendly one

The Instyle/Prostyle series consists of a number of models with different sizes, all using the same modern Dik Geurts techniques. With an Instyle you are assured of optimal enjoyment of a quality fire.

- Environmentally conscious enjoyment of fire
- Multi-purpose insert and built-in fires
- Different styles of detachable frames
- Choice of different frame types
- Optional kit for self-closing door for Instyle 500EA-700EA



Instyle 500



Efficiency 82,0%
WxDxH 520x350x480 mm



3-7 kW EA



Instyle 550



Efficiency 81,0%
WxDxH 527x350x560 mm



3-7 kW EA



Instyle 600



Efficiency 79,6%
WxDxH 600x360x480 mm



3-7 kW EA



Instyle 650



Efficiency 80,5%
WxDxH 650x380x495 mm



3-9 kW EA



Instyle 550



Instyle 700

Efficiency 81,6% **A+**
WxDxH 700x400x600mm



6-12 kW EA



Instyle 800

Efficiency 76,6% **A**
WxDxH 800x400x580mm



8-12 kW EA



Instyle 1000

Efficiency 77,7% **A**
WxDxH 1000x400x580mm



9-13 kW EA



Prostyle Front

Beautiful fire view
thanks to black
screen-printed glass

Prostyle 550



Prostyle 500

Efficiency 82,0% **A+**
WxDxH 520x344x480 mm



3-7 kW EA



Prostyle 550

Efficiency 81,0% **A+**
WxDxH 527x344x560 mm



3-7 kW EA



Prostyle 600

Efficiency 79,6% **A**
WxDxH 600x358x480 mm



3-7 kW EA



Prostyle 650

Efficiency 80,5% **A**
WxDxH 650x374x495 mm



3-9 kW EA



Prostyle 1000



Prostyle 700

Efficiency 81,6% **A+**
WxDxH 700x394x600mm



6-12 kW EA

Prostyle 800

Efficiency 76,6% **A**
WxDxH 800x394x580mm



8-12 kW EA

Prostyle 1000

Efficiency 77,7% **A**
WxDxH 1000x394x580mm



9-13 kW EA



Instyle Front, ventilator

Fire insert with ventilating fan

These ventilated inserts are equipped with a ventilating fan, which heats a room faster. When switched on, a pleasant, warm airflow can be felt from the front of the fire or through the convection openings.

Why Instyle V Next?

- Rapid heat distribution
- Impressive fire view
- Simple operation
- An efficient replacement for old fireplaces
- Optional kit for self-closing door for Instyle 600V-700V Next

How does it work?

A special adapter gives you full control of the fan. There are four speeds for gradual to rapid heating. And, thanks to a smart control sensor, the fan automatically adjusts to the desired temperature.



More information?
Watch the Instyle V Next video.

Instyle 600V Next

Efficiency 79,6% **A**
BxDxH 580x410x495mm



3-7 kW EA

Instyle 700V Next

Efficiency 81,6% **A+**
WxDxH 680x450x615mm



6-12 kW EA

Instyle 800V Next

Efficiency 76,6% **A**
WxDxH 780x450x595mm



8-12 kW EA



Instyle 700V Next



Instyle & Prostyle Tunnel 700

Splendid fire from two sides

The tunnel fireplaces Instyle and Prostyle Tunnel 700 have a hinged glass door on two sides. Thanks to its high output, this fire is ideal as a room divider in larger rooms.

- Beautiful see-through tunnel
- High output up to 12 kW
- In RS version almost completely airtight
- Optional kit for self-closing door for Instyle Tunnel 700EA

GREENBLOCKS

Instyle Tunnel 700

Efficiency 79,8% **A**
W x D x H 700 x 550 x 600 mm



- 9-12 kW
- IR
- EA
- DG Filter
- DG Cat
- DG Smart Assist
- DG Room Sealed

Prostyle Tunnel 700

Efficiency 79,8% **A**
W x D x H 700 x 554 x 600 mm



- 9-12 kW
- IR
- EA
- DG Filter
- DG Cat
- DG Smart Assist
- DG Room Sealed



Scan the QR code
for a preview

Instyle Tunnel 700



Scan the QR code
for a preview

Instyle Corner Slim

Unique panoramic fire view

These two-sided wood stoves are characterised by their panoramic fire view. The glass panes are placed against one another in the corner. This continuous glass window, without a metal corner post between the two panes, provides a full view of the fire.

- Optimal view of the fire
- High efficiency
- Perfect for an existing chimney or new construction
- Optional build in frame



Instyle Corner Slim 660/570

Efficiency 80,0% **A**
WxDxH 660x350x570 mm



Scan the QR code
for a preview



Scan the QR code
for a preview



Instyle Corner Slim 660/495

Efficiency 75,2% **A**
WxDxH 660x350x495 mm



4-10 kW



EA




DG
Room
Sealed



Optional build in frame 6S

- For a seamless finish to the fireplace assembly
- Very suitable for installation in a new build situation
- Width 6 cm (working width 5 cm)
- Solid frame, thickness 6 mm

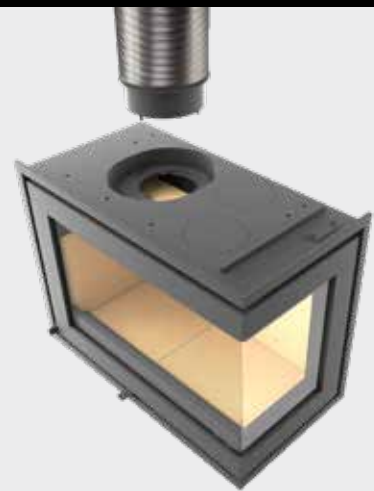

SlideConnect®


(only at Instyle Corner Slim 660/495)

- Easy connection to an existing or new flue
- Rotatable ring with 4 cm extra working space
- A major advantage, especially in existing situations

Instyle Corner 660 Low

Efficiency 76,3% **A**

WxDxH 660x350x495 mm

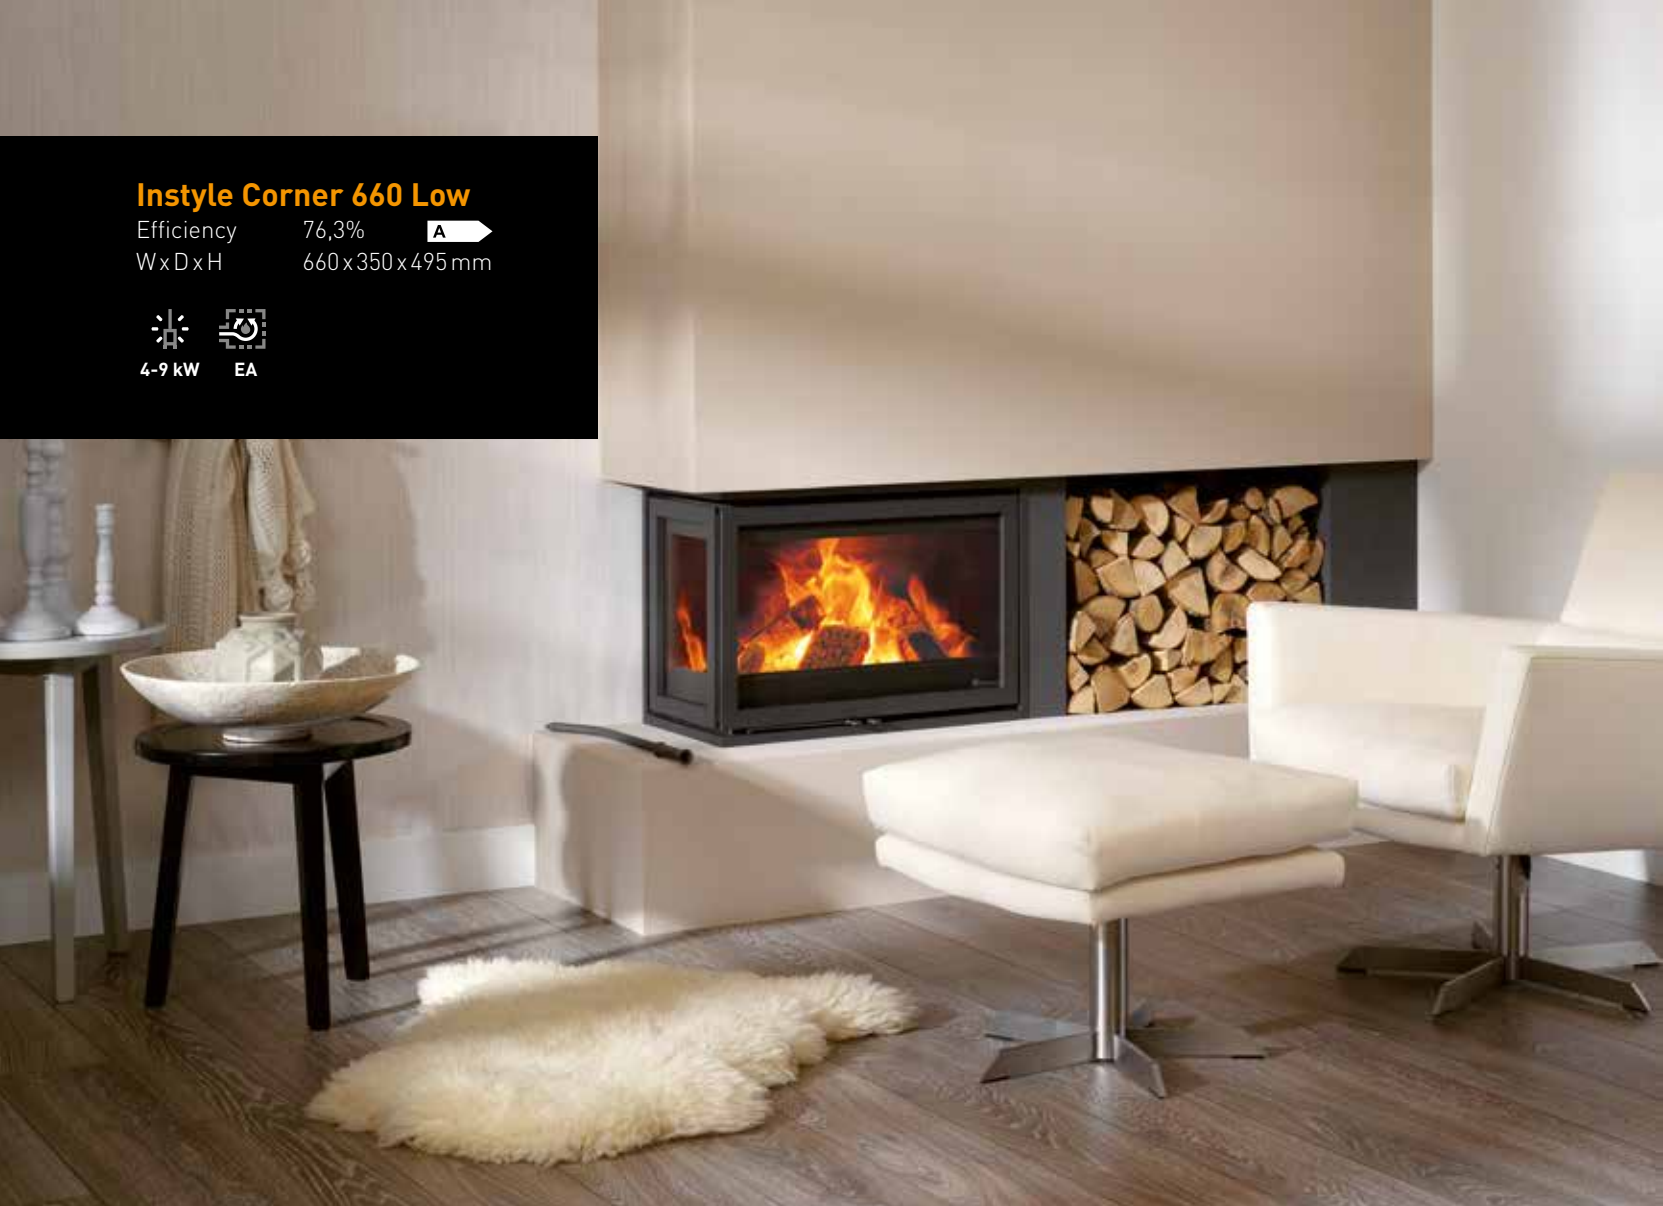

Instyle Corner 660 High

Efficiency 76,3% **A**

WxDxH 660x350x520 mm



Instyle Corner

Generous insert
fireplace with glass
on two sides

These two-sided fireplaces fit perfectly in the corner of a living space. The frames are only 20 mm wide, contributing to a sleek, minimalist design. Thanks to the large glass surface, you can enjoy a wide and unobstructed view of the fire.

- Side window available on the left or right
- Easy-to-use air slide for regulating the airflow
- Choose between the low or high model

Instyle Triple

Three sided glass and three sided fire

To ensure the highest possible efficiency, this insert is fitted with side windows with heat-reflecting infrared glass. This fire is only 49.5 cm high and therefore ideal for installation in most existing fireplaces.

- Subtle corner bars for better fire vision
- Suitable for installation in existing situation
- In RS version almost completely airtight

Instyle Triple 660 Low

Efficiency 76,3% **A**
WxDxH 662x380x495 mm



4-9 kW



IR



EA



DG
Room
Sealed



Easy installation

The various connection options ensure that the stove is quick and easy to install, regardless of the installation situation. There are three options for flue gas extraction.

1. Connection without drain material to an existing chimney flue (**sealing with ceramic wool**)
2. Connection with flexible or fixed pipe (**Liner Kit Pro**), Ø 150 or 180 mm
3. Connection with rejuvenated pipe (**connection piece**), Ø 150 or 180 mm

External air kit

Kit for supply of fresh air from outside, ideal for fully insulated houses

- Optional at 500 - 1000, 600V, Tunnel (only base)
- For rear and base connection
- Dimensions: Ø 80 mm



Linerkit Pro

Connection piece for flexible or rigid pipe.


- Optional with: 500 - 1000, 600V, Corner, Triple, Tunnel
- Connectable from the inside of the fire
- Reducer with 3 screw holes
- Dimensions: Ø 150 mm, Ø 180 mm



Connection piece

Connection piece for rejuvenated pipe.

- Optional with: 500 - 1000, 600V, Corner, Triple, Tunnel
- Reducer with 3 screw holes
- Dimensions: Ø 150 mm, Ø 180 mm



Convection kit

Connecting rings (2 pieces) for mounting on the convection holes.


- Optional with: 500 - 1000, 600V, Corner Slim, Tunnel
- For more heating power
- Dimensions: Ø 125 mm




INSERT-/BUILT-IN FIRES CONNECTION OPTIONS

Instyle / Prostyle


External air kit




Linerkit Pro



Connection piece



Convection kit






Easy air control

- At the front of the fire
- Both Instyle and Prostyle finishes

Door lock

- Stable and flexible door closure
- The cord ensures a good seal
- The door is adjustable and exchangeable
- Optional kit for self-closing door for Instyle 500EA-700EA, 600V-700V Next, Tunnel 700EA



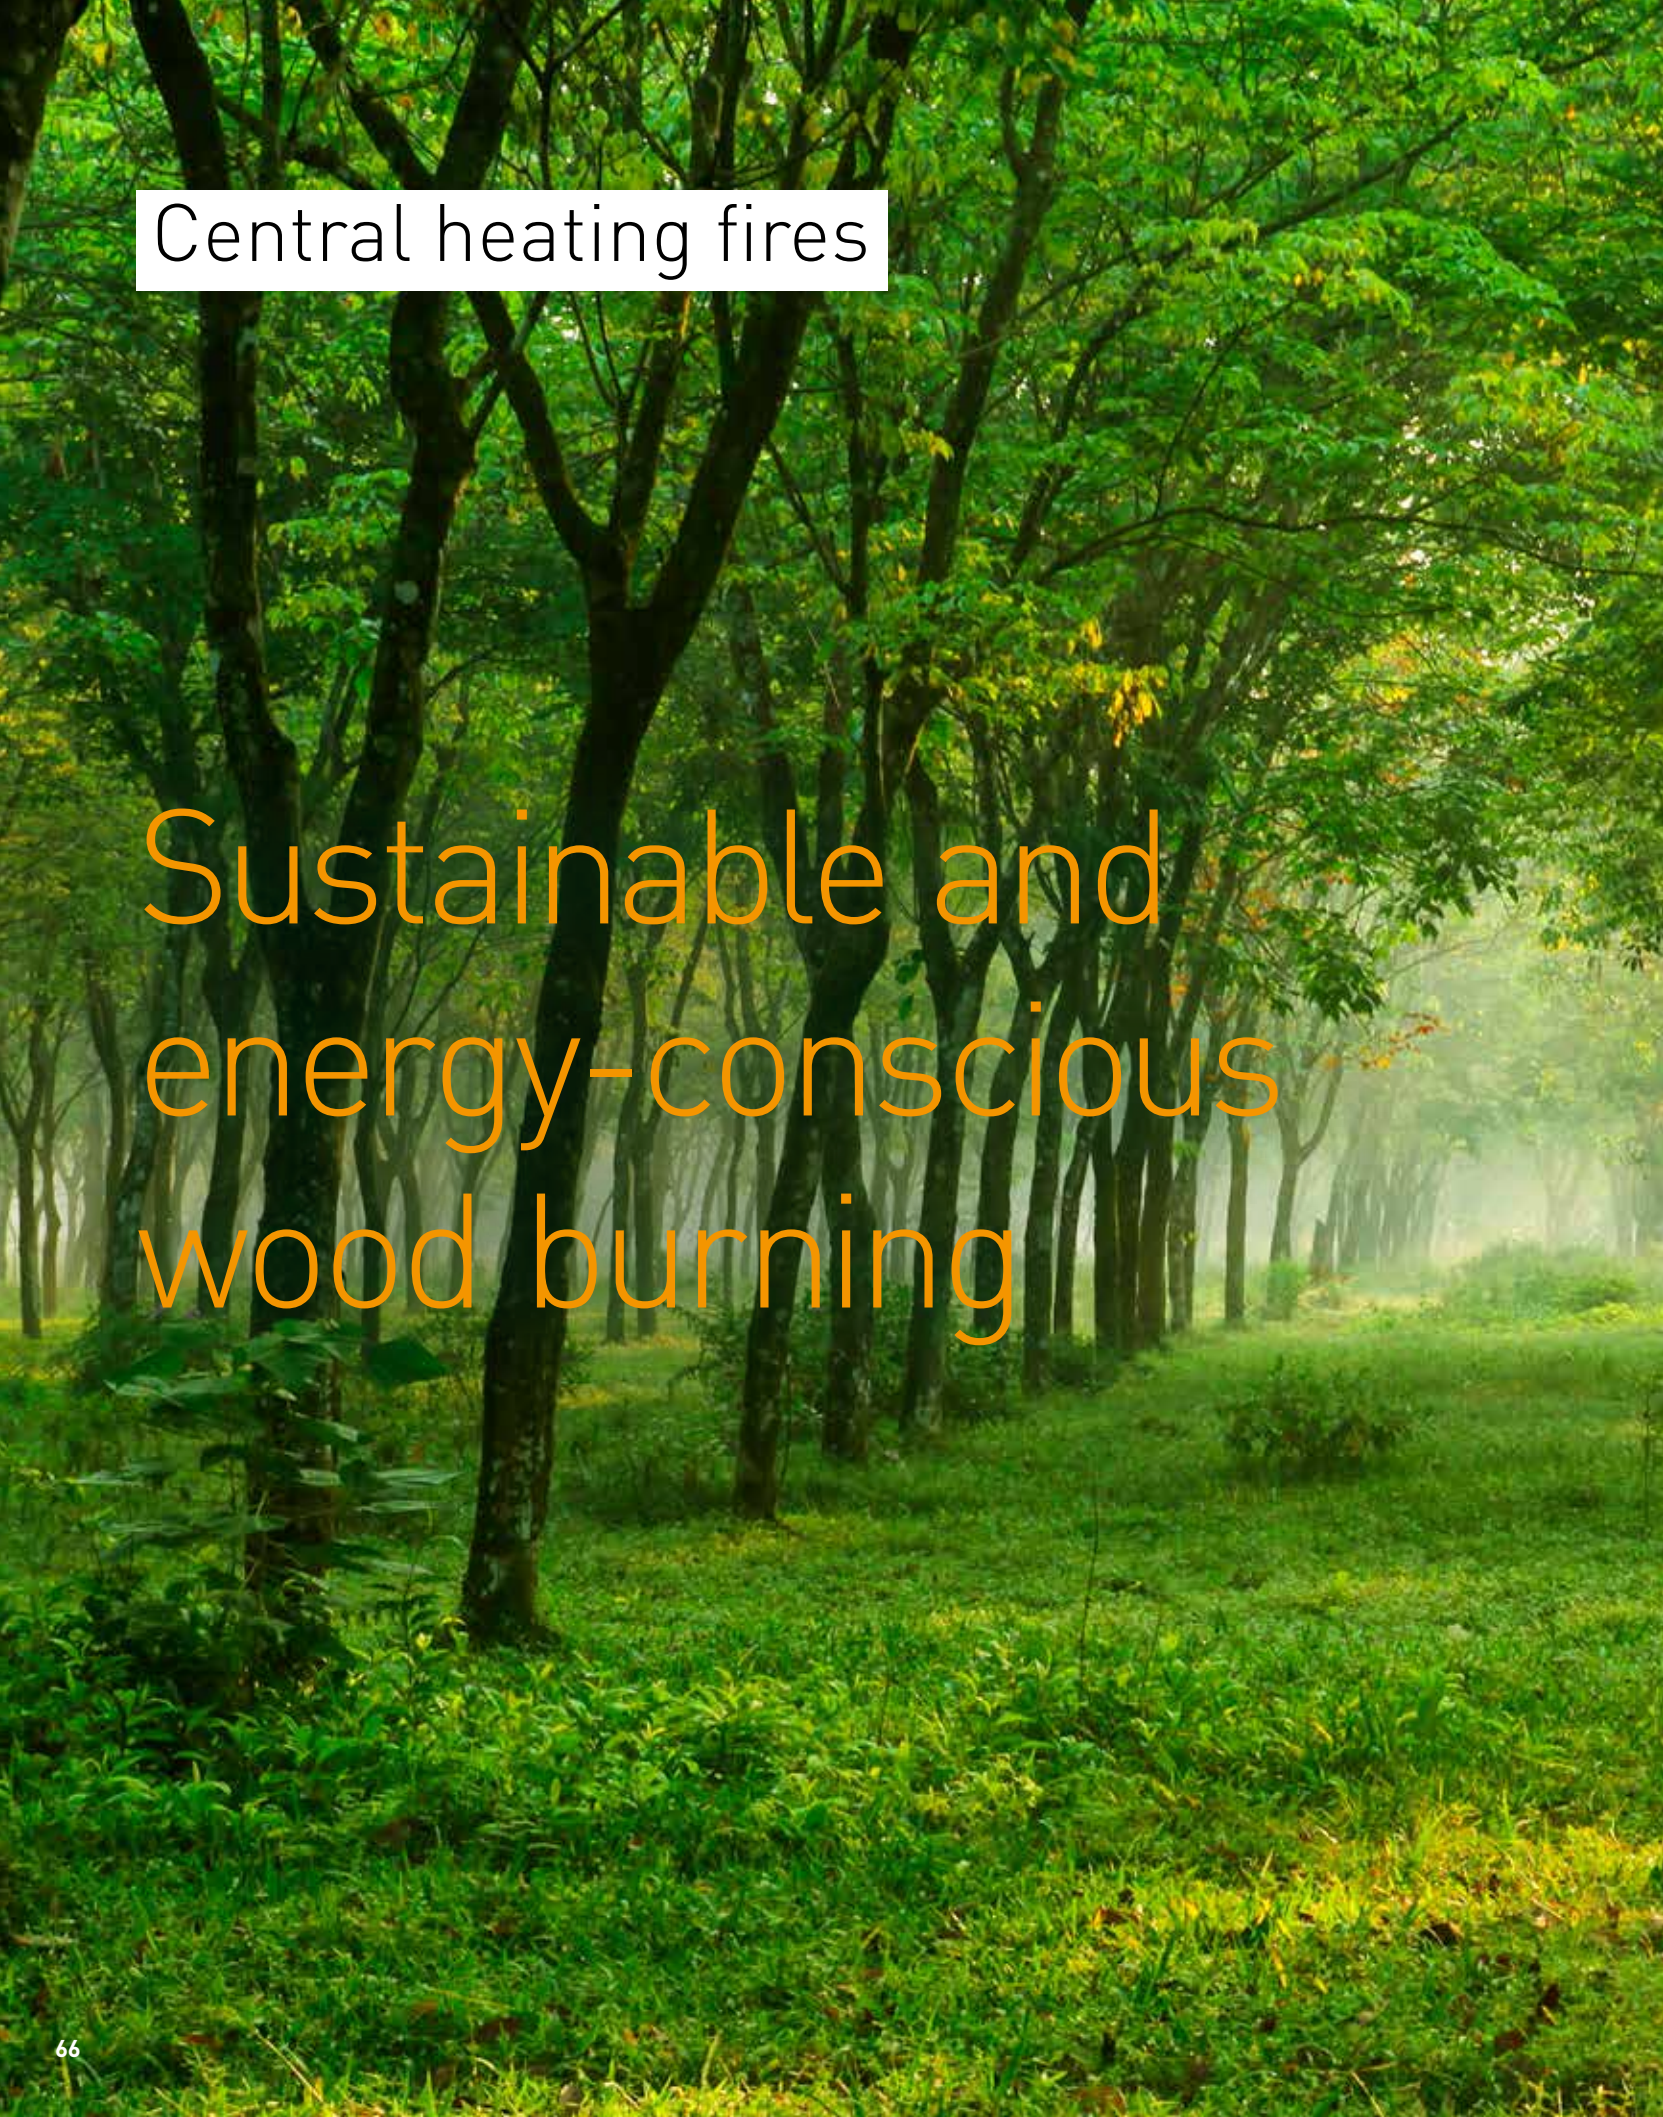

Central heating fires

Sustainable and energy-conscious wood burning

Green Design stands for sustainable, environmentally friendly and energy-conscious heating of fires and stoves connected to a central heating system.

Dik Geurts also supplies fires that you can connect to a central heating system, an environmentally friendly alternative way to heat your home. With these fires the hot flue gases are used to heat the water for your central heating system. Doing this means you get more efficiency from your fire or stove, resulting in a lower energy bill – and it's also sustainable.

- Environmentally friendly heating
- Durable/lower energy usage
- Suitable for any type of home
- Can be combined with solar panels and heat pumps
- Lower energy bill
- Maintenance friendly

More info

If you want to know more about Green Design or the operation of central heating fireplaces, visit www.greendesign.eu.



Scan the QR code for an informative animation film.



Ivar 10 H2O, Store

Efficiency 81,5% **A+**
W x D x H 650 x 468 x 1000 mm



8-12 kW



IR















EA



DG
Room
Sealed


Technical drawings

DESIGN FIRES

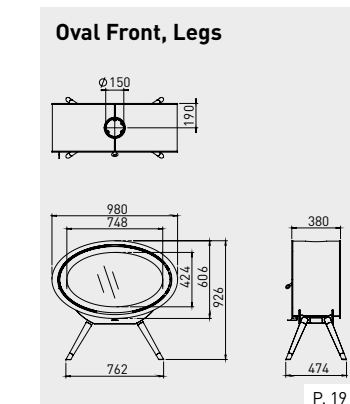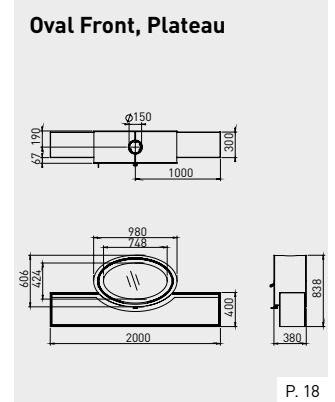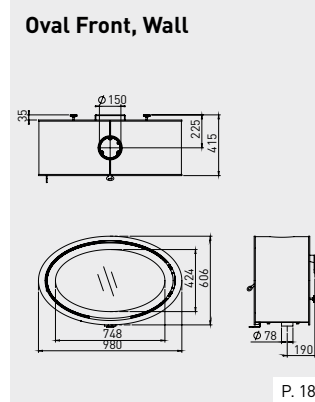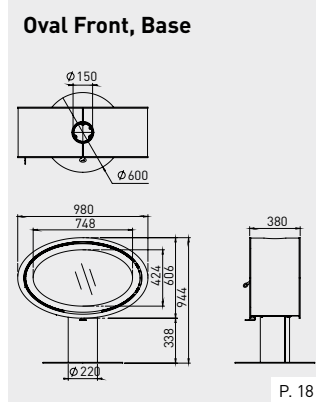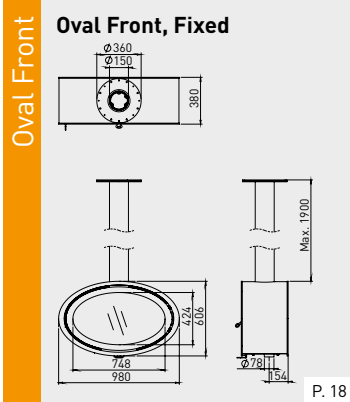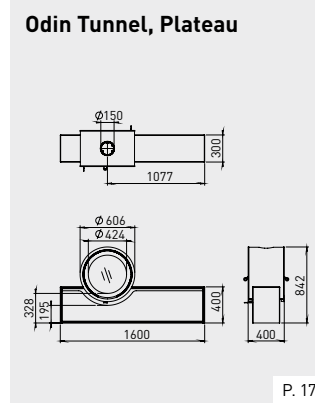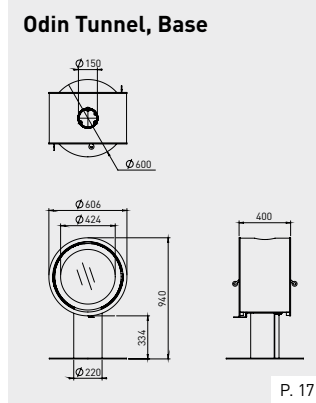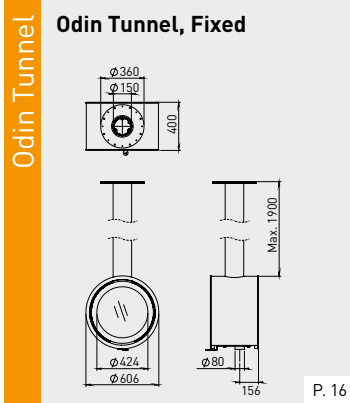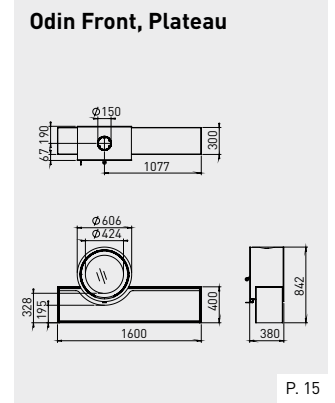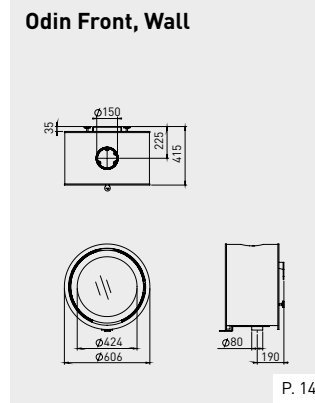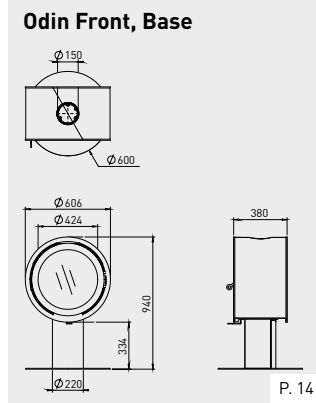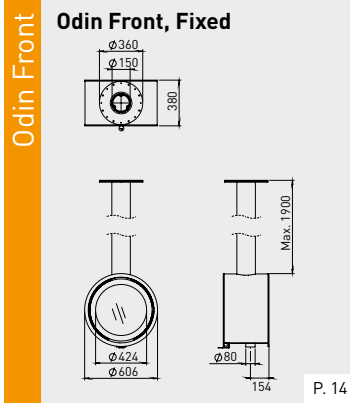


Oval Tunnel

Oval Tunnel, Fixed




P. 20

Oval Tunnel, Base




P. 21

Oval Tunnel, Legs



P. 21


Oval Tunnel, Plateau



P. 21


Bora Corner

Bora Corner, Cubes




P. 22

Bora Corner, Fixed




P. 23

Bora Corner, Floating Plateau




P. 23

Bora Corner, Straight Plateau



P. 24

Bora Corner, Wall




P. 25

WOOD AND MULTI-FUEL STOVES


Vidar Triple

Vidar Triple Medium, Store




P. 29

Vidar Triple Medium, Floating Plateau




P. 28

Vidar Triple Medium, Straight Plateau



P. 28

Vidar Triple Medium, Wall



P. 28

WOOD AND MULTI-FUEL STOVES

Vidar Triple

Vidar Triple Large, Store

Technical drawings of the Vidar Triple Large, Store stove. The top view shows a circular opening with a diameter of $\phi 180$ and a distance of 182 from the center to the edge, with a total width of 410. The front view shows a height of 1795, a main body height of 850, a width of 700, and a base width of 800. The side view shows a depth of 226 and a base height of 342.

P. 30

Vidar Triple Large, Straight Plateau

Technical drawings of the Vidar Triple Large, Straight Plateau stove. The top view shows a circular opening with a diameter of $\phi 180$ and a distance of 750 from the center to the edge, with a total width of 1500. The front view shows a height of 885, a main body height of 800, and a base width of 1500. The side view shows a depth of 450 and a base height of 350.

P. 30

Vidar Triple Large, Wall

Technical drawings of the Vidar Triple Large, Wall stove. The top view shows a circular opening with a diameter of $\phi 180$ and a distance of 202 from the center to the edge, with a total width of 430. The front view shows a height of 1480, a main body height of 535, a width of 700, and a base width of 800. The side view shows a depth of 226 and a base height of 225.

P. 30

Vidar Triple Small, Store

Technical drawings of the Vidar Triple Small, Store stove. The top view shows a circular opening with a diameter of $\phi 125$ and a distance of 160 from the center to the edge, with a total width of 360. The front view shows a height of 850, a main body height of 500, a width of 400, and a base width of 500. The side view shows a depth of 176 and a base height of 342.

P. 31

Vidar Triple Small, Floating Plateau

Technical drawings of the Vidar Triple Small, Floating Plateau stove. The top view shows a circular opening with a diameter of $\phi 125$ and a distance of 160 from the center to the edge, with a total width of 1200. The front view shows a height of 885, a main body height of 500, and a base width of 1200. The side view shows a depth of 450 and a base height of 300.

P. 31

Vidar Triple Small, Straight Plateau

Technical drawings of the Vidar Triple Small, Straight Plateau stove. The top view shows a circular opening with a diameter of $\phi 125$ and a distance of 750 from the center to the edge, with a total width of 1500. The front view shows a height of 885, a main body height of 500, and a base width of 1500. The side view shows a depth of 450 and a base height of 350.

P. 31

Vidar Triple Small, Wall

Technical drawings of the Vidar Triple Small, Wall stove. The top view shows a circular opening with a diameter of $\phi 125$ and a distance of 160 from the center to the edge, with a total width of 360. The front view shows a height of 535, a main body height of 500, a width of 400, and a base width of 500. The side view shows a depth of 176 and a base height of 227.

P. 31

Folke

Technical drawings of the Folke stove. The top view shows a circular opening with a diameter of $\phi 150$ and a distance of 144 from the center to the edge, with a total width of 320. The front view shows a height of 1000, a main body height of 396, a width of 320, and a base width of 476. The side view shows a depth of 898 and a base height of 342.

P. 32

Kalle Next

Technical drawings of the Kalle Next stove. The top view shows a circular opening with a diameter of $\phi 150$ and a distance of 137 from the center to the edge, with a total width of 345. The front view shows a height of 1000, a main body height of 450, a width of 345, and a base width of 510. The side view shows a depth of 844 and a base height of 381.

P. 33

Modivar 5

Modivar 5, Floating Plateau

Technical drawings of the Modivar 5, Floating Plateau stove. The top view shows a circular opening with a diameter of $\phi 125$ and a distance of 175 from the center to the edge, with a total width of 1200. The front view shows a height of 887, a main body height of 450, and a base width of 1200. The side view shows a depth of 450 and a base height of 300.

P. 34

Modivar 5, Straight Plateau

Technical drawings of the Modivar 5, Straight Plateau stove. The top view shows a circular opening with a diameter of $\phi 125$ and a distance of 750 from the center to the edge, with a total width of 1500. The front view shows a height of 907, a main body height of 450, and a base width of 1500. The side view shows a depth of 450 and a base height of 350.

P. 34

Modivar 5, Store Front

Technical drawings of the Modivar 5, Store Front stove. The top view shows a circular opening with a diameter of $\phi 125$ and a distance of 140 from the center to the edge, with a total width of 450. The front view shows a height of 1000, a main body height of 355, a width of 310, and a base width of 450. The side view shows a depth of 368 and a base height of 453.

P. 34


Modivar 5, Store Corner

Technical drawings of the Modivar 5, Store Corner stove. The top view shows a circular opening with a diameter of $\phi 125$ and a distance of 140 from the center to the edge, with a total width of 450. The front view shows a height of 1000, a main body height of 355, a width of 310, and a base width of 450. The side view shows a depth of 368 and a base height of 453.

P. 34


Orbe

Orbe



P. 36


Orbe, High



P. 37

Soren 5


Soren 5



P. 38

Aste 5


Aste 5



P. 38

Lars 1000


Lars 1000



P. 39


Ivar 5

Ivar 5, Low




P. 40

Ivar 5, High



P. 42


Ivar 5, Store



P. 43


Ivar 8

Ivar 8, Low



P. 44


Ivar 8, Store



P. 45


Jannik

Jannik Medium, Low




P. 46

Jannik Medium, High



P. 46

Jannik Large



P. 47

INSERT-/BUILT-IN FIRES INSTYLE/PROSTYLE

Instyle Front

Instyle 500
+ Classic Line frame 4S

Technical drawing showing front and side views of the Instyle 500 fire with Classic Line frame 4S. Dimensions include: front view (520, 340, Ø150, 190, 144, 350), side view (380, 337, 580, 537, 54, 480, Ø80, 184), and depth (587).

P. 52

Instyle 550
+ Classic Line frame 4S

Technical drawing showing front and side views of the Instyle 550 fire with Classic Line frame 4S. Dimensions include: front view (527, 340, Ø150, 170, 144, 350), side view (387, 417, 587, 617, 54, 480, Ø80, 184), and depth (587).

P. 52

Instyle 600
+ Classic Line frame 4S

Technical drawing showing front and side views of the Instyle 600 fire with Classic Line frame 4S. Dimensions include: front view (600, 400, Ø150, 190, 144, 360), side view (460, 337, 660, 537, 194, 480, Ø80), and depth (537).

P. 52

Instyle 650
+ Classic Line frame 4S

Technical drawing showing front and side views of the Instyle 650 fire with Classic Line frame 4S. Dimensions include: front view (650, 497, 360, Ø150, 190, 144, 380), side view (510, 352, 710, 552, 214, 480, Ø80), and depth (552).

P. 52

Instyle Front

Instyle 700
+ Classic Line frame 4S

Technical drawing showing front and side views of the Instyle 700 fire with Classic Line frame 4S. Dimensions include: front view (700, 545, 400, Ø180, 190, 159, 400), side view (560, 457, 760, 657, 54, 480, Ø80, 234), and depth (400).

P. 52

Instyle 800
+ Classic Line frame 4S

Technical drawing showing front and side views of the Instyle 800 fire with Classic Line frame 4S. Dimensions include: front view (800, 645, 450, Ø180, 190, 159, 400), side view (660, 437, 860, 637, 234, 480, Ø80), and depth (400).

P. 52

Instyle 1000
+ Classic Line frame 4S

Technical drawing showing front and side views of the Instyle 1000 fire with Classic Line frame 4S. Dimensions include: front view (1000, 845, 550, Ø180, 190, 159, 400), side view (860, 437, 1060, 637, 234, 480, Ø80), and depth (400).

P. 52

Prostyle Front

Prostyle 500
+ Modern Line frame

Technical drawing showing front and side views of the Prostyle 500 fire with Modern Line frame. Dimensions include: front view (520, 340, Ø150, 190, 144, 344), side view (470, 427, 580, 537, 480, Ø80), and depth (537).

P. 54

Prostyle 550
+ Modern Line frame

Technical drawing showing front and side views of the Prostyle 550 fire with Modern Line frame. Dimensions include: front view (527, 340, Ø150, 170, 144, 344), side view (477, 507, 587, 617, 560, Ø80), and depth (617).

P. 54

Prostyle 600
+ Modern Line frame

Technical drawing showing front and side views of the Prostyle 600 fire with Modern Line frame. Dimensions include: front view (600, 400, Ø150, 190, 144, 354), side view (550, 427, 660, 537, 480, Ø80), and depth (537).

P. 54

Prostyle 650
+ Modern Line frame

Technical drawing showing front and side views of the Prostyle 650 fire with Modern Line frame. Dimensions include: front view (650, 497, 360, Ø150, 190, 144, 374), side view (600, 442, 710, 552, 495, 98, Ø80), and depth (552).

P. 54

Prostyle 700
+ Modern Line frame

Technical drawing showing front and side views of the Prostyle 700 fire with Modern Line frame. Dimensions include: front view (700, 545, 400, Ø180, 190, 159, 394), side view (650, 547, 760, 657, 600, 98, 394, Ø80), and depth (394).

P. 54

Prostyle 800
+ Modern Line frame

Technical drawing showing front and side views of the Prostyle 800 fire with Modern Line frame. Dimensions include: front view (800, 645, 450, Ø180, 190, 159, 394), side view (750, 527, 860, 637, 580, 98, 394, Ø80), and depth (394).

P. 54

Prostyle 1000
+ Modern Line frame

Technical drawing showing front and side views of the Prostyle 1000 fire with Modern Line frame. Dimensions include: front view (1000, 845, 550, Ø180, 190, 159, 394), side view (950, 527, 1060, 637, 580, 98, 394, Ø80), and depth (394).

P. 54

Instyle (ventilator)

Instyle 600V Next
+ Classic Line frame 4S

Technical drawings showing front, side, and detail views of the Instyle 600V Next heater. Dimensions include: front view (580, 344, 194, 220, 410, 440, 640, 337, 547), side view (495, 243), and detail view (Ø150, Ø80).

P. 56

Instyle 700V Next
+ Classic Line frame 4S

Technical drawings showing front, side, and detail views of the Instyle 700V Next heater. Dimensions include: front view (680, 545, 360, 180, 708, 263, 450, 540, 740, 457, 657), side view (615, 283), and detail view (Ø180, Ø120, Ø80).

P. 56

Instyle 800V Next
+ Classic Line frame 4S

Technical drawings showing front, side, and detail views of the Instyle 800V Next heater. Dimensions include: front view (780, 645, 400, 180, 708, 263, 450, 640, 840, 437, 647), side view (595, 283), and detail view (Ø180, Ø120, Ø80).

P. 56

Instyle Tunnel

Instyle Tunnel 700
+ Classic Line frame 4S

Technical drawings showing front, side, and detail views of the Instyle Tunnel 700 heater. Dimensions include: front view (700, 554, 180, 294, 550, 560, 760, 457, 657), side view (600, 674, 447, 273), and detail view (Ø180, Ø80).

P. 58

Prostyle Tunnel

Prostyle Tunnel 700
+ Slim Line frame

Technical drawings showing front, side, and detail views of the Prostyle Tunnel 700 heater. Dimensions include: front view (700, 554, 180, 294, 550, 650, 720, 547, 617), side view (600, 674, 447, 272), and detail view (Ø180, Ø80).

P. 58

Instyle Corner Slim

Instyle Corner Slim 660/495

Technical drawings showing front, side, and detail views of the Instyle Corner Slim 660/495 heater. Dimensions include: front view (230, 150, 158/118, 565, 660, 315, 420/274, 660), side view (255, 495, 190, 350), and detail view (Ø180, Ø80).

P. 60

Instyle Corner Slim 660/570

Technical drawings showing front, side, and detail views of the Instyle Corner Slim 660/570 heater. Dimensions include: front view (317, 180, 132, 565, 660, 390, 420/274, 660), side view (255, 570, 190, 350), and detail view (Ø80, 47).

P. 60

Instyle Corner

Instyle Corner 660 Low

Technical drawings showing front, side, and detail views of the Instyle Corner 660 Low heater. Dimensions include: front view (230, 142, 350, 525, 660, 197, 345, 495), side view (160, 160), and detail view (Ø150, Ø80).

P. 62

Instyle Corner 660 High

Technical drawings showing front, side, and detail views of the Instyle Corner 660 High heater. Dimensions include: front view (230, 142, 350, 525, 660, 197, 370, 520), side view (160, 160), and detail view (Ø150, Ø80).

P. 62

Instyle Triple

Instyle Triple 660 Low

Technical drawings showing front, side, and detail views of the Instyle Triple 660 Low heater. Dimensions include: front view (150, 142, 380, 442, 562, 345, 420/274, 660, 495), side view (226, 495, 190, 350), and detail view (Ø150, Ø80).

P. 63

CENTRAL HEATING FIRES

Ivar 10 H20




















Ivar 10 H20, Store











Technical drawings showing front, side, and detail views of the Ivar 10 H20, Store heater. Dimensions include: front view (500, 390, 1000, 650, 468), side view (338, 201), and detail view (Ø150, Ø80).

P. 66

Technical specifications

GREENBLOCKS

Page	Wood burning fireplaces and stoves	 Net output (kW)	 Efficiency (%)	 Energy efficiency class	 Flue upper (ø, mm)	 Flue rear (ø, mm)	 External air connection (EA)	 Maximum log length (cm)	 Weight (kg)	 Interior vermiculite natural	 Interior vermiculite dark anthracite	 Infrared glass (IR)	 Type: wall	 Type: freestanding	 Type: free hanging	 DG Filter	 DG Therm	 DG Cat	 DG Smart Assist	 DG Room Sealed
Design fires																				
Front fires																				
14	Odin Front, Fixed ³¹	4,0 - 8,0	75,2	A	150	-	optional	33	85	-	+	-	-	-	+	-	-	-	-	-
14	Odin Front, Base ³¹	4,0 - 8,0	75,2	A	150	-	optional	33	100	-	+	-	-	+	-	-	-	-	-	-
14	Odin Front, Wall ³¹	4,0 - 8,0	75,2	A	150	-	optional	33	85	-	+	-	+	-	-	-	-	-	-	-
15	Odin Front, Plateau ³¹	4,0 - 8,0	75,2	A	150	-	optional	33	125	-	+	-	-	+	-	-	-	-	-	-
18	Oval Front, Fixed ³¹	6,0 - 10,0	75,9	A	150	-	optional	50	120	-	+	-	-	-	+	-	-	-	-	+
18	Oval Front, Base ³¹	6,0 - 10,0	75,9	A	150	-	optional	50	135	-	+	-	-	+	-	-	-	-	-	+
18	Oval Front, Plateau ³¹	6,0 - 10,0	75,9	A	150	-	optional	50	160	-	+	-	-	+	-	-	-	-	-	+
18	Oval Front, Wall ³¹	6,0 - 10,0	75,9	A	150	-	optional	50	120	-	+	-	+	-	-	-	-	-	-	+
19	Oval Front, Legs ³¹	6,0 - 10,0	75,9	A	150	-	optional	50	130	-	+	-	-	+	-	-	-	-	-	+
Tunnel fires																				
16	Odin Tunnel, Fixed	6,0 - 10,0	75,0	A	150	-	optional	33	85	-	+	-	-	-	+	-	-	-	-	-
17	Odin Tunnel, Base	6,0 - 10,0	75,0	A	150	-	optional	33	130	-	+	-	-	+	-	-	-	-	-	-
17	Odin Tunnel, Plateau	6,0 - 10,0	75,0	A	150	-	optional	33	125	-	+	-	-	+	-	-	-	-	-	-
20	Oval Tunnel, Fixed ³¹	9,0 - 12,0	81,5	A+	150	-	optional	50	120	-	+	+	-	-	+	-	-	-	-	+
21	Oval Tunnel, Base ³¹	9,0 - 12,0	81,5	A+	150	-	optional	50	135	-	+	+	-	+	-	-	-	-	-	+
21	Oval Tunnel, Legs ³¹	9,0 - 12,0	81,5	A+	150	-	optional	50	130	-	+	+	-	+	-	-	-	-	-	+
21	Oval Tunnel, Plateau ³¹	9,0 - 12,0	81,5	A+	150	-	optional	50	160	-	+	+	-	+	-	-	-	-	-	+
2-sided fires																				
22	Bora Corner, Cubes ³¹	4,0 - 9,0	78,1	A	150	-	optional	36	145	-	+	+	-	+	-	-	-	-	-	+
23	Bora Corner, Fixed ³¹	4,0 - 9,0	78,1	A	150	-	optional	36	95	-	+	+	-	-	+	-	-	-	-	+
23	Bora Corner, Floating Plateau ³¹	4,0 - 9,0	78,1	A	150	-	optional	36	145	-	+	+	-	+	-	-	-	-	-	+
24	Bora Corner, Straight Plateau ³¹	4,0 - 9,0	78,1	A	150	-	optional	36	140	-	+	+	-	+	-	-	-	-	-	+
25	Bora Corner, Wall ³¹	4,0 - 9,0	78,1	A	150	-	optional	36	95	-	+	+	+	-	-	-	-	-	-	+
Wood and multi-fuel stoves																				
3-sided fires																				
29	Vidar Triple Medium, Store ³¹	4,0 - 9,0	76,3	A	150	-	optional	50	130	+	-	+	-	+	-	-	-	-	-	+
28	Vidar Triple Medium, Floating Plateau ³¹	4,0 - 9,0	76,3	A	150	-	optional	50	170	+	-	+	-	+	-	-	-	-	-	+
28	Vidar Triple Medium, Straight Plateau ³¹	4,0 - 9,0	76,3	A	150	-	optional	50	165	+	-	+	-	+	-	-	-	-	-	+
28	Vidar Triple Medium, Wall ³¹	4,0 - 9,0	76,3	A	150	-	optional	50	123	+	-	+	+	-	-	-	-	-	-	+
30	Vidar Triple Large, Store ³¹	6,0 - 10,0	79,0	A	180	-	optional	50	137	+	-	+	-	+	-	-	-	-	-	+
30	Vidar Triple Large, Straight Plateau ³¹	6,0 - 10,0	79,0	A	180	-	optional	50	173	+	-	+	-	+	-	-	-	-	-	+
30	Vidar Triple Large, Wall ³¹	6,0 - 10,0	79,0	A	180	-	optional	50	131	+	-	+	+	-	-	-	-	-	-	+
31	Vidar Triple Small, Store ³¹	4,0 - 7,0	79,0	A	125/130	-	optional	35	102	+	-	+	-	+	-	-	-	-	-	+
31	Vidar Triple Small, Floating Plateau ³¹	4,0 - 7,0	79,0	A	125/130	-	optional	35	147	+	-	+	-	+	-	-	-	-	-	+
31	Vidar Triple Small, Straight Plateau ³¹	4,0 - 7,0	79,0	A	125/130	-	optional	35	142	+	-	+	-	+	-	-	-	-	-	+
31	Vidar Triple Small, Wall ³¹	4,0 - 7,0	79,0	A	125/130	-	optional	35	100	+	-	+	+	-	-	-	-	-	-	+
32	Folke ³¹	4,0 - 8,0	77,3	A	150	150	optional	35	125	+	-	+	-	+	-	-	-	-	-	+
33	Kalle Next ³¹	4,0 - 8,0	77,3	A	150	150	optional	35	125	+	-	+	-	+	-	+	-	-	-	+
Front fires																				
34	Modivar 5, Floating Plateau ³¹	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	140	+	-	-	-	+	-	-	-	-	-	+
34	Modivar 5, Straight Plateau ³¹	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	135	+	-	-	-	+	-	-	-	-	-	+
34	Modivar 5, Store Front ³¹	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	120	+	-	-	-	+	-	-	-	-	-	+
34	Modivar 5, Store Corner ³¹	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	120	+	-	-	-	+	-	-	-	-	-	+
36	Orbe ³¹	5,0 - 9,0	81,6	A+	150	150	optional	30	125	+	-	-	-	+	-	-	-	+	+	+
37	Orbe, High ³¹	5,0 - 9,0	81,6	A+	150	150	optional	30	145	+	-	-	-	+	-	+	+	+	+	+
38	Soren 5 ¹¹³¹	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	85	+	-	-	-	+	-	-	-	-	-	+
38	Aste 5 ¹¹³¹	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	85	+	-	-	-	+	-	-	-	-	-	+

Page	Wood burning fireplaces and stoves	 Net output (kW)	 Efficiency (%)	 Energy efficiency class	Flue upper (ø, mm)	Flue rear (ø, mm)	 External air connection (EA)	Maximum log length (cm)	Weight (kg)	Interior vermiculite natural	Interior vermiculite dark anthracite	 Infrared glass (IR)	Type: wall	Type: freestanding	Type: free hanging	 DG Filter	 DG Therm	 DG Cat	 DG Smart Assist	 DG Room Sealed
Wood and multi-fuel stoves																				
Front fires																				
39	Lars 1000	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	100	-	+	-	-	-	+	-	-	-	-	+
41	Ivar 5, Low ¹⁾³⁾	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	85	-	+	-	-	+	-	-	-	-	-	+
42	Ivar 5, High ¹⁾³⁾	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	90	-	+	-	-	-	-	-	-	-	-	+
43	Ivar 5, Store ¹⁾³⁾	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	105	-	+	-	-	+	-	-	-	-	-	+
44	Ivar 8, Low ¹⁾³⁾	5,0 - 10,0	76,6	A	150	150	optional	46	100	-	+	-	-	-	+	-	-	-	-	+
45	Ivar 8, Store ¹⁾³⁾	5,0 - 10,0	76,6	A	150	150	optional	46	120	-	+	-	-	+	-	-	-	-	-	+
46	Jannik Medium, Low ³⁾	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	90	-	+	-	-	+	-	-	-	-	-	-
46	Jannik Medium, High ³⁾	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	90	-	+	-	-	-	-	-	-	-	-	-
47	Jannik Large	4,0 - 8,0	81,5	A+	130&150	130&150	optional	40	105	-	+	-	-	+	-	-	-	-	-	-
Inserts and built-in wood fires																				
Front fires (built-in/insert)																				
52	Instyle 500 ³⁾	3,0 - 7,0	82,0	A+	150	-	optional	35	80	+	-	-	-	-	-	-	-	-	-	-
52	Instyle 550 ³⁾	3,0 - 7,0	81,0	A+	150	-	optional	36	94	+	-	-	-	-	-	-	-	-	-	-
52	Instyle 600 ³⁾	3,0 - 7,0	79,6	A	150	-	optional	42	120	+	-	-	-	-	-	-	-	-	-	-
52	Instyle 650 ³⁾	3,0 - 9,0	80,5	A	150	-	optional	40	108	+	-	-	-	-	-	-	-	-	-	-
52	Instyle 700 ³⁾	6,0 - 12,0	81,6	A+	180	-	optional	45	116	+	-	-	-	-	-	-	-	-	-	-
52	Instyle 800	8,0 - 12,0	76,6	A	180	-	optional	55	130	+	-	-	-	-	-	-	-	-	-	-
54	Instyle 1000	9,0 - 13,0	77,7	A	180	-	optional	75	145	+	-	-	-	-	-	-	-	-	-	-
54	Prostyle 500 ³⁾	3,0 - 7,0	82,0	A+	150	-	optional	35	80	+	-	-	-	-	-	-	-	-	-	-
54	Prostyle 550 ³⁾	3,0 - 7,0	81,0	A+	150	-	optional	36	94	+	-	-	-	-	-	-	-	-	-	-
54	Prostyle 600 ³⁾	3,0 - 7,0	79,6	A	150	-	optional	42	120	+	-	-	-	-	-	-	-	-	-	-
54	Prostyle 650 ³⁾	3,0 - 9,0	80,5	A	150	-	optional	40	108	+	-	-	-	-	-	-	-	-	-	-
54	Prostyle 700 ³⁾	6,0 - 12,0	81,6	A+	180	-	optional	45	116	+	-	-	-	-	-	-	-	-	-	-
54	Prostyle 800	8,0 - 12,0	76,6	A	180	-	optional	55	130	+	-	-	-	-	-	-	-	-	-	-
54	Prostyle 1000	9,0 - 13,0	77,7	A	180	-	optional	75	145	+	-	-	-	-	-	-	-	-	-	-
Front fires, with ventilating fan (insert)																				
56	Instyle 600V Next	3,0 - 7,0	79,6	A	150	-	optional	42	98	+	-	-	-	-	-	-	-	-	-	-
56	Instyle 700V Next	6,0 - 12,0	81,6	A+	180	-	optional	45	120	+	-	-	-	-	-	-	-	-	-	-
56	Instyle 800V Next	8,0 - 12,0	76,6	A	180	-	optional	55	130	+	-	-	-	-	-	-	-	-	-	-
Tunnel fires (built-in)																				
58	Instyle Tunnel 700 ³⁾	9,0 - 12,0	79,8	A	180	-	optional	50	140	+	-	+	-	-	-	+	-	+	+	+
58	Prostyle Tunnel 700 ³⁾	9,0 - 12,0	79,8	A	180	-	optional	50	140	+	-	+	-	-	-	+	-	+	+	+
2-Sided fires (built-in/insert)																				
60	Instyle Corner Slim 660/495 ³⁾	4,0 - 10,0	75,2	A	150 ²⁾	-	optional	50	110	+	-	-	-	-	-	-	-	-	-	+
60	Instyle Corner Slim 660/570 ³⁾	5,0 - 10,0	80,0	A	180	-	optional	50	120	+	-	+	-	-	-	-	-	-	-	+
62	Instyle Corner 660 Low	4,0 - 9,0	76,3	A	150	-	including	50	105	+	-	-	-	-	-	-	-	-	-	-
62	Instyle Corner 660 High	4,0 - 9,0	76,3	A	150	-	including	50	105	+	-	-	-	-	-	-	-	-	-	-
3-Sided fires (built-in/insert)																				
63	Instyle Triple 660 Low	4,0 - 9,0	76,3	A	150	-	optional	50	100	+	-	+	-	-	-	-	-	-	-	+
Central heating fires																				
66	Ivar 10 H2O, Store	8,0 - 12,0	81,5	A+	150	-	optional	50	225	+	-	+	-	+	-	-	-	-	-	+

¹⁾ Multi-fuel kit available for burning multi-fuel/coal.

²⁾ SlideConnect® = variable connection to the flue [can be shifted to 4 cm].

³⁾ Defra approved = approved to use in smoke controlled areas.



Dealer

 **Dik Geurts**
Creation of flames

DRU Verwarming B.V.
P.O. Box 1021, 6920 BA Duiven
Ratio 8, 6921 RW Duiven

The Netherlands

T. +31 (0)26 - 319 5 319
www.dikgeurts.com

Drugasar Ltd.
Deans Road, Swinton
Manchester, M27 0JH

United Kingdom

T. +44 (0)161 - 793 8700
www.dikgeurts.co.uk

DRU Belgium
Kontichsesteenweg 69/1
2630 Aartselaar

Belgium

T. +32 (0)3 - 450 7000
www.dikgeurts.be

since
1754



BY APPOINTMENT OF
THE COURT OF THE NETHERLANDS



Dik Geurts is a trademark of DRU Verwarming B.V. Subject to changes. The colours in this brochure may vary from the actual products. Nothing in this publication may be used without prior written consent from DRU Verwarming B.V.

Art.9934/76 | 2026-02

SOCIAL MEDIA: For more inspiration and information, visit one of our social media channels or scan the QR code.

